


Features & Benefits

- Durable metal panels for interior applications at new or existing 15/16" suspension grid.
- Choice between Square Edge panels that fully conceal the grid suspension for a "seamless" look or Reveal Edge panels that semi-conceal to articulate the grid.
- Clip-in placement allows for downward accessibility without special tools.
- Panels available in a variety of different finishes and perforation options.
- GREENGUARD Gold certification available with Woodlands[™] woodgrain finishes.

Applications

- Airports
- Passenger Terminals
- Retail
- Assembly Halls
- Convention Centers
- Stadiums

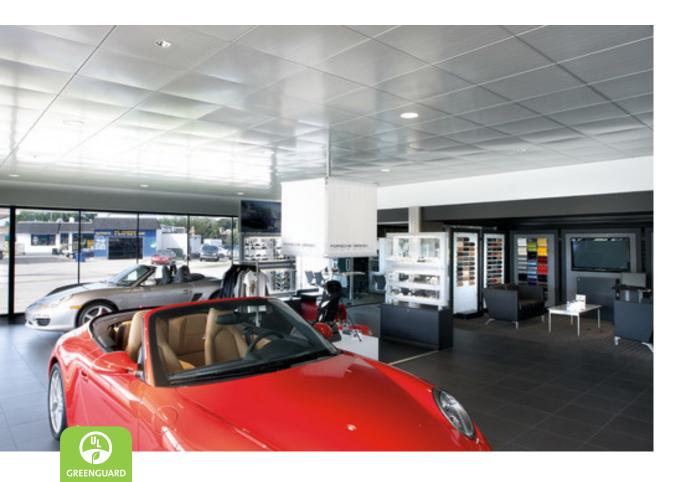

Perimeter Channel Cross Tee Main Runner

LEED® v4.1 Highlights


Materials and Resources (MR)

Waste Management Planning Interiors Life Cycle Impact Reduction Environmental Product Declarations Sourcing of Raw Materials Material Ingredients Waste Management

Indoor Environmental Quality (EQ)

Low-Emitting Materials Interior Lighting Acoustic Performance

Recycled Content: Aluminum 78%











Family Number & Name	Edge Type	Dimensions	Perforations (% Open Area)	Material	NRC	Fire Class	Low VOC	Recycled Content
252589:SPAN: Spanair [®]	SCIR: Clip-in Reveal Edge (Semi-Concealed)	24 x 24: 24" x 24" 24 x 48: 24" x 48"	Standard SOLID: 0% D: 16.2% E: 20.8% J: 58.2% O: 70% R: 11.1%	ndard D: 0% 6.2% 0.8% 8.2% 70% 1.1% .32AL:	0.00***			
Spanair Metal Panel	SCIS: Clip-in Square Edge (Fully Concealed)	V: 4.9% Aluminum SCIS: AA: 2.5%	Aluminum	up to 0.90***	A	~	78%	

Product Code Example:

252589:SPAN:SCIS:24x24:.32AL:AA:44:Y




Rockfon® Spanair® Clip-in Panel System should be used in Seismic Design Categories A-C only.

Custom panel sizes available - Contact Rockfon® for information

- * See the Rockfon Perforations Brochure for graphic representations of the perforations listed and the complete offering of Premium Perforations available.
- ** For designer specified Perforation, contact Rockfon Technical Services at 1-800-323-7164 or techservices@rockfon.com.
- *** NRC values are dependent on perforation patterns, plenum depth and acoustical backer options. Contact Rockfon Technical Services for more information at 1-800-323-7164 or techservices@rockfon.com.

Note

- Acoutex[™] Backer standard with perforated panel.
- Perforated panel available without Acoutex.
- This system is not approved for exterior use.

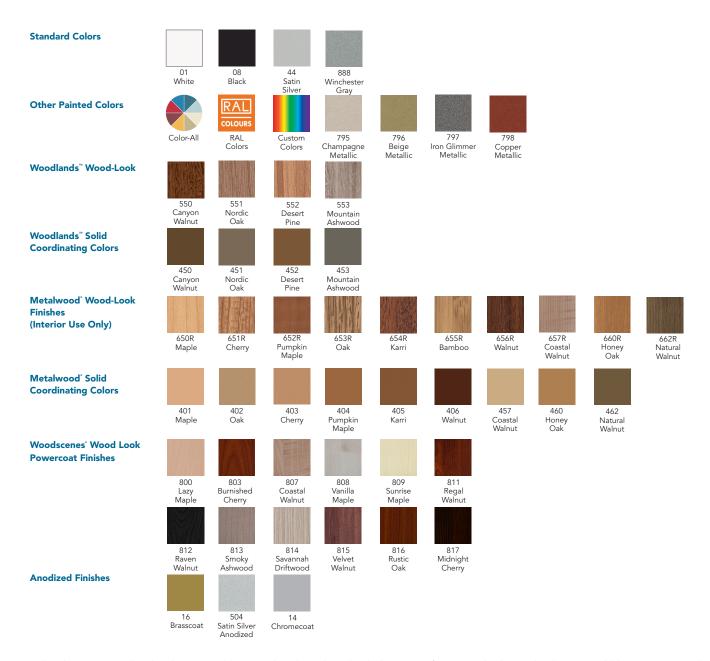


Colors shown are reproduced as close as possible to actual product color within the limitations of printing technology. Color chips are available upon request and should be reviewed before making a final selection. Variations in color matches of system components to ceiling panels can result from slight differences in texture, room lighting, painting process and subjectivity of observers.

As stated in CISCA's "Metal Ceilings Technical Guidelines," site conditions can impact installed visual appearance of metal ceilings. Usage of high gloss and metallic finishes in areas of critical lighting may alter final appearance and should be considered for finish selection.

- GREENGUARD Gold certification available with Woodlands™ woodgrain finishes.
- All Wood Look finishes will have the grain pattern applied parallel to the length of the panel.
- Metalwood Woodgrain finishes are a 0.008" vinyl laminate which replicates the look of real wood.
- Woodscenes finishes are a decorative powdercoat finish replicating real wood.
- Woodlands and Woodscenes finishes are suitable for interior and exterior use.
- Metalwood finishes are for interior use only.

Standard Perforation Options

0.0625" Diameter Holes 0.354" Straight Centers 2.5% Open Area

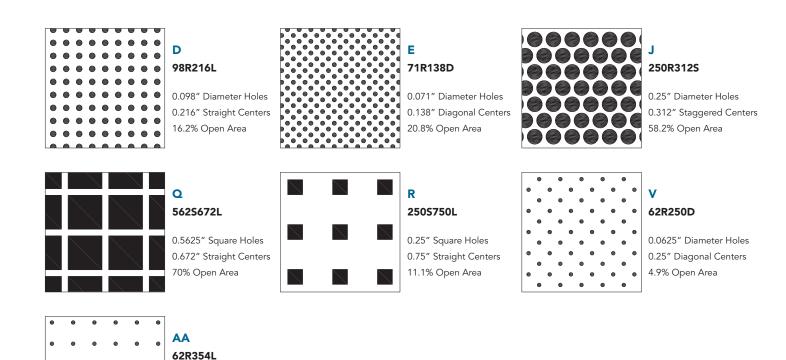


Acoustical Performance

Spanair® Clip-in Panels	Clip-in Concealed Panels	Clip-in Semi-Concealed Panels	
NRC - Perforated with Acoutex™ Backer	0.70	0.70	
NRC - Perforated with 1-1/2" Acoustical Pad	0.90	0.90	

See the Rockfon Perforations Brochure for graphic representations of the perforations listed and the complete offering of Premium Perforations available.

Suspension Components

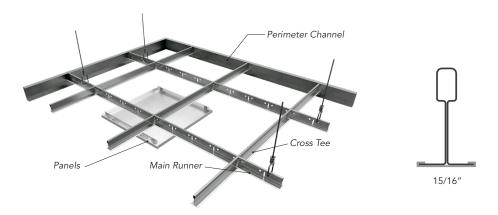

15/16" Grid Suspension System

Detail	Description	Catalog Number	Duty Rating	Length	Height	Slotting
		Main Runners				
4. 4. 4.	15/16" Face Main Runner	10.00.200.xxxH	HD	144"	1-41/64"	6" On Center
11 1	15/16" Face Main Runner	10.00.250.xxxH	ID	144"	1-41/64"	6" On Center
		Cross Tees				
11.	4' Cross Tee – 15/16"	10.01.209.xxxH	N/A	48"	1-1/2"	3 slots 12" on center
	2' Cross Tee – 15/16"	10.01.229.xxxH	N/A	24"	1-1/2"	No slotting

 ${\it Installation of Grid Suspension System is based on panel size}.$


Grid is available in Standard Painted, Premium Painted, Custom Painted finishes, and Woodscenes® finishes.

Perimeter Components

Detail	Description	Catalog Number	Length	Dimensions
Wall Angle				
3/4"	3/4" x 15/16" Hemmed Wall Angle – Aluminum	38.90.124.xxx	12'	3/4" × 15/16" × 12'
	Wall Channel			
2-1/2"	2-1/2" High Wall Channel – Aluminum	60.00.008.xxx	10'	3/4" x 2-1/2" x 15/16"
15/16"	2-1/2" High Wall Channel – Steel	60.00.009.xxx	10'	3/4" x 2-1/2" x 15/16"
	Infinity [™] Perimeter 1	Trim		
	Engineered Straight	252565 INFE:STD	12' Max	Height 4", 6", 8" 10" or 12" Length based on project requirements
	Engineered Curved	252566 INFC:STD	12' Max	Height 4", 6", 8" 10" or 12" Length based on project requirements
	Infinity R Reveal Edge	252565 INFE:REV	12' Max	4" Height – length based on project requirements
	Infinity Z Razor Edge	252565 INFE:RAZ	12' Max	2' Height, 6" projection Length based on project requirements

All perimeter components are available in Standard and Premium painted colors, custom painted colors, and Woodscenes® finishes For additional information on Infinity Perimeter Trim, please consult the Infinity Data Sheet.

Accessories



Hold Down Insert for 2-1/2" Wall Channel

Hold Down Inserts

Size	Part Number	Rockfon Reference Number			
	Aluminum				
11"	60.00.033	249678			
22"	60.00.034	249679			
Steel					
11"	60.00.031	249676			
22"	60.00.032	249677			



Acoustical Pads - Black Vinyl Wrapped

Description	Catalog Number	Rockfon Reference Number
2' x 2' - 1" x 1#	58.01.059.008	250505
2' x 4' - 1" x 1#	58.01.061.008	250507
2' x 2' 1.5" x 1#	58.01.064.008	250509
2' x 4'- 1.5" x 1#	58.01.063.008	250508

Other Accessories



Leaf Springs 988.00



Perimeter Clip 1499.00 #251952



Swing Clips 987.00



Seismic Perimeter Clip 1496.00 #250374



Wall Springs 63.26.202 #254302



Wire Grid Spacer 60.00.021 #250526 for use with Acoustical Pad

Properties

Material

0.032" Aluminum



Fire Performance

Surface burning characteristics: UL723 (ASTM E84) Flame Spread Index: 0 Smoke Developed Index (UL Labeled): 0



Environment

Aluminum: 78% recycled content Steel: 30% recycled content 100% locally recyclable



Sustainability

Woodlands" woodgrain finishes are UL GREENGUARD Gold certified for low VOC (chemical) emissions and meetthe California Department of Public Health (CDPH) Standard Method v1.2-2017 for offices and classroom environments



Hygien

Metal provides no sustenance to microorganisms



Cleaning

✓ Damp cloth



Warranty

1-Year Limited Product Warranty See rockfon.com

070924

Rockfon

4849 S. Austin Ave. Chicago, IL 60638 USA

Tel. +1-800-323-7164 cs@rockfon.com rockfon.com

2024 | Subject to alterations in range and product technology without prior notice. Rockfon accepts no responsibility for printing errors.

ROCKWOOL A/S 2022. All rights reserved.

[®] denotes a trademark that is registered in the United States of America.