


Rockfon[®] Planostile[™] D Three Dimensional Panel System

Features & Benefits

- Lay-in metal panels with variable deep recess or reveal options for creation of 3-dimensional interior grid based installation.
- Range of recessed, reveal edge, sloped, and diagonal panels in depths of 1" to 4".
- Acoustical performance options available.

Applications

- Conference Rooms
- Lobbies
- Airport Terminals
- Transit Facilities
- Retail

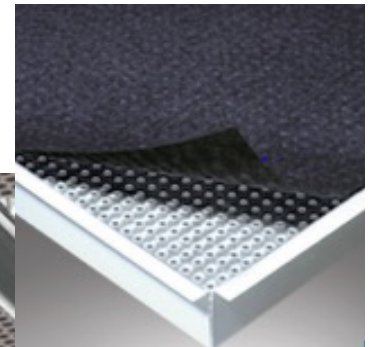

Rockfon® Planostile™ D Three Dimensional Panel System

LEED® v4.1 Highlights


Materials and Resources (MR)

- Waste Management Planning ✓
- Interiors Life Cycle Impact Reduction ✓
- Environmental Product Declarations ✓
- Sourcing of Raw Materials ✓
- Material Ingredients -
- Waste Management ✓

Indoor Environmental Quality (EQ)

- Low-Emitting Materials ✓
- Interior Lighting -
- Acoustic Performance ✓

Recycled Content: 78% Aluminum
30% Steel

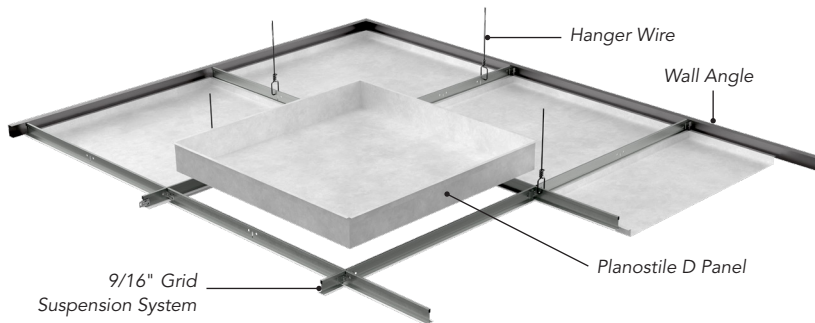

Family Number & Name	Panel Profile	Dimensions	Perforations (% Open Area)	Material	NRC	Fire Class	Low VOC	Recycled Content
Planostile D Reveal Edge 252588 (PLAD)		2' x 2' 1" x 1" up/down	Standard Perforations AA: 2.5% Open D: 16.2% Open E: 20.8% Open	.040 Aluminum	Up to .90*	A	✓	78%
Planostile D Sloped 252588 (PLDS)		2" x 2" up/down 3" x 3" up/down						
Planostile D Diagonal 252588 (PLDD)		4" x 4" up/down						

Product Code Example:

252588PLST:PLAD:24x24:.040:44:E:Y

Family Number	Panel Size	Material	Finish	Perforation
252588:PLAN	24"x24"	40	44	E
Planostile D Reveal		.040 Aluminum	Satin Silver	Perforation E with Acoutex™

*NRC values are dependent on the acoustical backer options available.

Acoutex™ backer standard on perforated panels.

Panels install on standard 9/16" face grid system.

Note: This system is not approved for exterior use

Rockfon® Planostile™ D Three Dimensional Panel System

Color Chart


Standard Colors




Other Painted Colors



Woodlands™ Solid Coordinating Colors

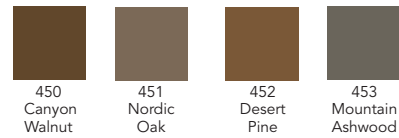

Metalwood® Solid Coordinating Colors

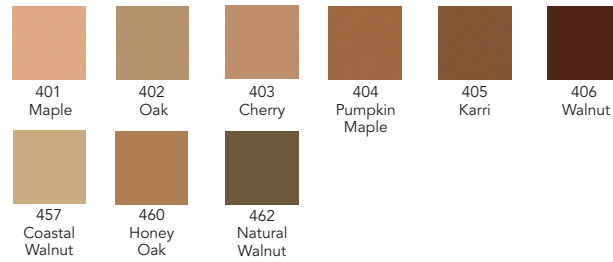


Colors shown are reproduced as close as possible to actual product color within the limitations of printing technology. Color chips are available upon request and should be reviewed before making a final selection. Variations in color matches of system components to ceiling panels can result from slight differences in texture, room lighting, painting process and subjectivity of observers.

As stated in CISCA's "Metal Ceilings Technical Guidelines," site conditions can impact installed visual appearance of metal ceilings. Usage of high gloss and metallic finishes in areas of critical lighting may alter final appearance and should be considered for finish selection.


Rockfon® Planostile™ D Three Dimensional Panel System

Perforation Options


Standard Perforation Options



D
98R216L
0.098" Diameter holes
0.216" Staggered centers
16.2% Open area



E
71R138D
0.071" Diameter holes
0.138" Staggered centers
20.8% Open area



AA
62R354L
0.0625" Diameter holes
0.354" Staggered centers
2.5% Open area



Acoustical Performance

Planostile D Panels	NRC
With Acoutex™ Backer	0.70
With 1.5" x 1.5 lb insulation	0.90

Custom perforation options are available. Please contact estimating@rockfon.com for information.

Rockfon® Planostile™ D Three Dimensional Panel System Suspension Components

9/16" Face Grid Suspension



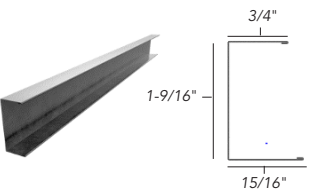

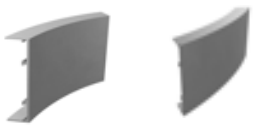


	Product Number	Duty Rating	Length	Slotting	Spacing
Main Runners					
 <p>9/16" Main Runner</p>	10.04.000.xxx	ID	144"	6" on Center	48" on Center
	10.04.040.xxx	HD	144"	6" on Center	48" on Center
Cross Tees					
 <p>9/16" Cross Tee</p>	10.04.014.xxx	N/A	48"	12" on Center	24" on Center
	10.04.022.xxx	N/A	24"	No Slots	24" on Center

Duty rating applies only to main runners installed on a 4' span.
 Suspension system for Planostile based on Chicago Metallic® Ceiling Suspension Systems.
 See ICC /ESR-2631 for component testing information.
 For seismic installations, please refer to the Rockfon Seismic Ceiling Suspension Guide.

Rockfon® Planostile™ D

Three Dimensional Panel System


Perimeter Components

	Product	Dimensions	Length	Height	Packaging
Wall Angle					
	38.90.124.xxx	3/4" x 15/16"	144"	-	300 ft per Carton
	C3228.xx	1" x 2"	144"	-	Sold per Piece
Wall Channel					
	60.00.011.xxx	3/4" x 1-9/16" x 15/16"	10'	-	Sold per Piece
Perimeter Trim	Product	Part Number	Length	Height	Packaging
	Engineered Straight	252565 / INFE:STD	12' Max	4", 6", 8", 10", 12"	As Needed
	Engineered Curved	252566 / INFC:STD	12' Max	4", 6", 8", 10", 12"	As Needed
	Infinity R Reveal Edge	252565 / INFE:REV	12' Max	4"	As Needed
	Infinity Z Razor Edge	252565 / INFE:RAZ	12' Max	2" high 6" flange	As Needed




Rockfon® Planostile™ D Three Dimensional Panel System

Accessories

Acoustical Pads - Black Vinyl Wrapped

	Description	Catalog Number	Rockfon Reference Number
	2' x 2' Poly-Wrapped Acoustical Pad 1" x 1#" #	58.01.059.008	250505
	2' x 4' Poly-Wrapped Acoustical Pad 1" x 1#" #	58.01.061.008	250507
	2' x 2' Poly-Wrapped Acoustical Pad 1.5" x 1#" #	58.01.064.008	250509
	2' x 4' Poly-Wrapped Acoustical Pad 1.5" x 1#" #	58.01.063.008	250508

Additional Accessories

	Description	Catalog Number	Rockfon Reference Number
	Aluminum Hold Down for 1-9/16" Channel 11"	60.00.013	249674
	Aluminum Hold Down for 1-9/16" Channel 22"	60.00.015	249675
	Seismic Perimeter Clip	1496.00	250374
	Perimeter Clip	1499.00	251952
	Hold Down Clip (1" Panels) - Black Metal	63.26.200	264683
	Clear Plastic Hold Down Clips - 100 Pcs. per Ctn. (For 1" Panels Only)	8886.00	250382

Rockfon® Planostile™ D Three Dimensional Panel System


Panel Options




Reveal Edge Panel - Upward or Downward




Sloped Panel - Upward or Downward

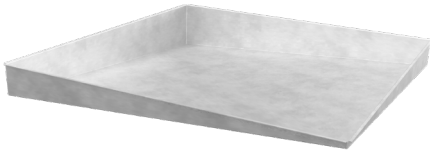


Diagonal Panel - Upward or Downward




1" Up or Down



2" Up or Down



3" Up or Down

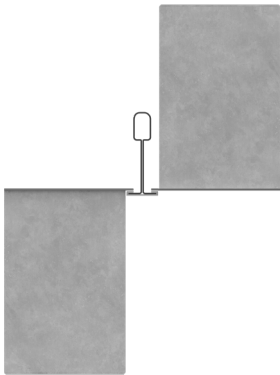

4" Up or Down

Rockfon® Planostile™ D Three Dimensional Panel System

Properties

Material

0.040" Aluminum



Fire Performance

Surface burning characteristics:
UL723 (ASTM E84) Flame Spread Index: 0
Smoke Developed Index (UL Labeled): 0



Environment

Aluminum: 78% recycled content
Steel: 30% recycled content
100% locally recyclable



Warranty

1-Year Limited Product Warranty
See rockfon.com



Hygiene

Metal provides no sustenance
to microorganisms



Cleaning

✓ Damp cloth

07.0824

Rockfon

4849 S. Austin Ave.
Chicago, IL 60638 USA